

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
1 November 2001 (01.11.2001)

PCT

(10) International Publication Number
WO 01/81845 A1

(51) International Patent Classification⁷: **F25J 1/02**

30, NL-2596 HR The Hague (NL). **WILSON, Jonathan, Hamilton** [GB/NL]; Carel van Bylandtlaan 30, NL-2596 HR The Hague (NL).

(21) International Application Number: **PCT/EP01/04661**

(22) International Filing Date: **24 April 2001 (24.04.2001)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:
00201470.2 **25 April 2000 (25.04.2000) EP**

(71) Applicant (for all designated States except US): **SHELL INTERNATIONALE RESEARCH MAATSCHAPPIJ B.V.** [NL/NL]; Carel van Bylandtlaan 30, NL-2596 HR The Hague (NL).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **ELION, Wiveka, Jacoba** [NL/NL]; Carel van Bylandtlaan 30, NL-2596 HR The Hague (NL). **JONES, Keith, Anthony** [GB/NL]; Badhuisweg 3, NL-1031 CM Amsterdam (NL). **MCLACHLAN, Gregory, John** [AU/NL]; Carel van Bylandtlaan

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **CONTROLLING THE PRODUCTION OF A LIQUEFIED NATURAL GAS PRODUCT STREAM**

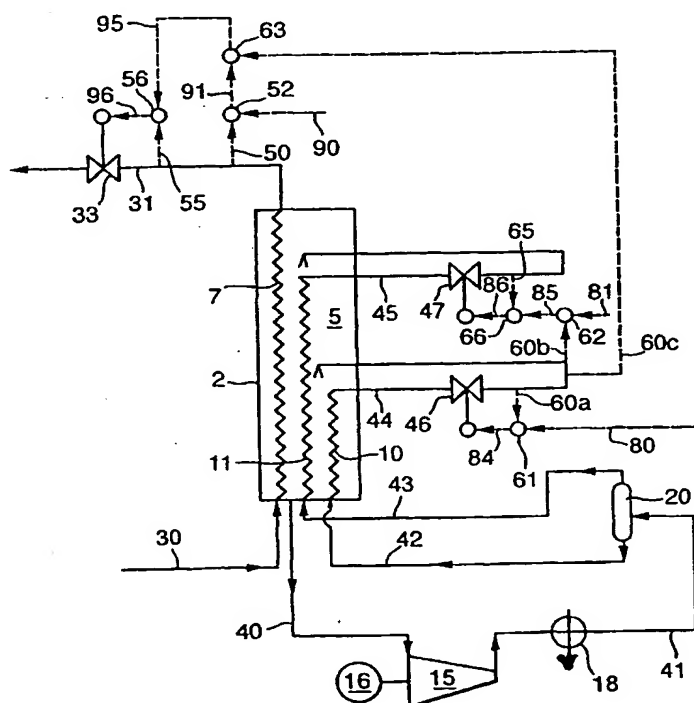

(57) Abstract: Controlling the production of a liquefied natural gas (31) comprises measuring the temperature (50) and the flow rate (55) of the liquefied natural gas (31); maintaining the flow rate of the heavy mixed refrigerant (60a) at an operator manipulated set point (80), and determining the flow rate of the light mixed refrigerant (86) from (i) the flow rate of the heavy mixed refrigerant (80) and (ii) an operator manipulated set point for the ratio of the flow rate of the heavy mixed refrigerant to the flow rate of the light mixed refrigerant (81); determining a dependent set point (91) for the ratio of the flow rate of the liquefied natural gas to the flow rate of the heavy mixed refrigerant such that the temperature (50) of the liquefied natural gas is maintained at an operator manipulated set point (90); determining a dependent set point (95) for the flow rate of the liquefied natural gas (95) from (i) the dependent set point (91) for the ratio of the flow rate of the liquefied natural gas product stream to the flow rate of the heavy mixed refrigerant and (ii) the flow rate of the heavy mixed refrigerant (60c); and maintaining the flow rate of the liquefied natural gas (55a) at its dependent set point (95).